

PRODUCT BROCHURE

Solar & Energy Storage



LUX POWER TECHNOLOGY CO., LTD

www.luxpowertek.com | info@luxpowertek.com

LUX POWER^{TEK}

OFF-GRID INVERTER

SONAR 5K WPV



Support Li-ion battery, advanced battery management integrated for Lead-acid battery



Advanced paralleling technical to support 9 units paralleling



2 MPPT charger controllers integrated with HV and LV MPPT models



WIFI/GPRS remote monitoring, setting and upgrade

Local monitoring, setting, upgrade supported



Flexible working modes with settable charge and load power supply priority


Support solar and AC take the load jointly, working as hybrid



Support micro grid system with separate generator input terminal, and can remote control generator



Solution

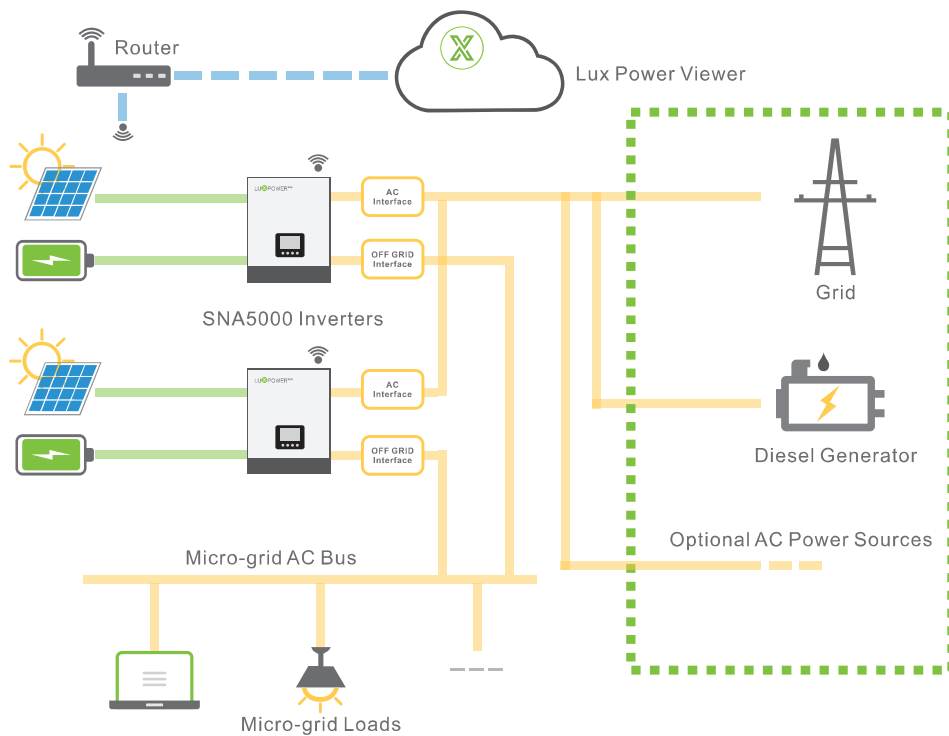

Off grid system is a good solution for the area where is no electricity, shortcomings or with unstable power

Advantage of photovoltaic power:

- ▶ economic
- ▶ clean
- ▶ environmentally friendly
- ▶ noise-free


Can partially or completely replace diesel generator. System Capacity: 3-50kW

Working Modes

SNA5k serial off grid inverters can support the system to work as a back-up power or a replacement of diesel generator. Since the inverter support paralleling function, the capacity of system can range from 3kW to 50kW. The inverter support several working modes.

Pure off-grid working mode: working as traditional off grid inverters, can set output to utility first, battery first or solar first.

Hybrid working mode: working as a hybrid, support solar and utility jointly take the load, can set to self consumption mode or charge priority mode.

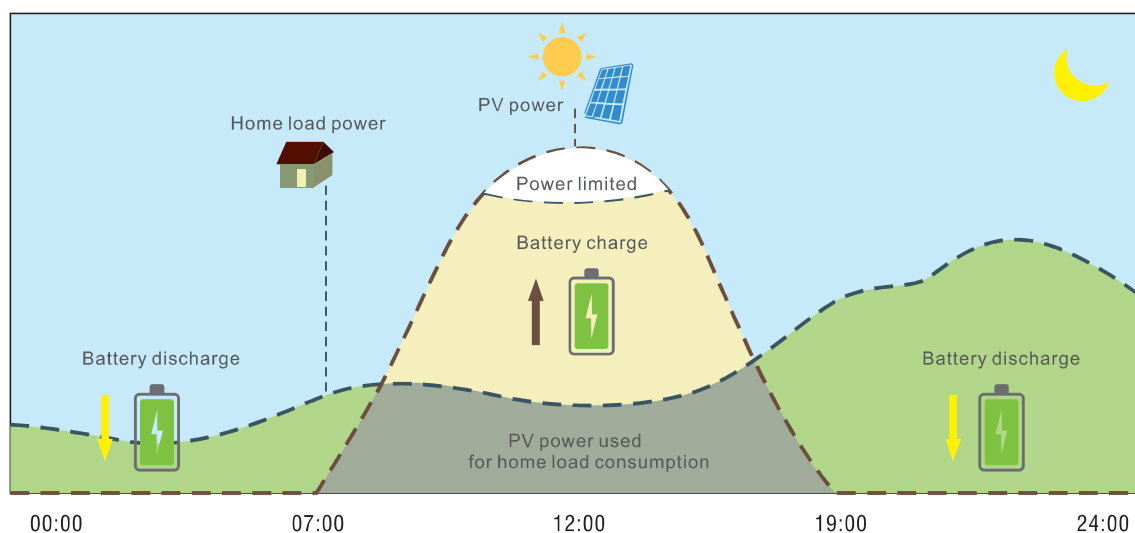

Output Data	SNA 3000 WPV	SNA 4000 WPV	SNA 5000 WPV
Rated power	3000W/3000VA	4000W/4000VA	5000W/5000VA
Parallel capacity	YES	YES	YES
Normal output voltage	230/240, Split phase 220/110 Vac *	230/240, Split phase 220/110 Vac *	230/240, Split phase 220/110 Vac *
Normal output frequency	50/60Hz	50/60Hz	50/60Hz
Surge power	6000VA	8000VA	10000VA
Switch time	10ms	10ms	10ms
Waveform	Pure sine wave	Pure sine wave	Pure sine wave

Battery Data			
Battery Type	Lithium/Lead-Acid	Lithium/Lead-Acid	Lithium/Lead-Acid
Normal Voltage	51.2V/48V	51.2V/48V	51.2V/48V
Max. Charge Voltage	59V	59V	59V

Solar Charger Data			
Max. Recommended PV Power	6000W	6000W	6000W
MPPT Tracker	2	2	2
Max. PV Open Circuit Voltage	480Vdc	480Vdc	480Vdc
MPPT Voltage Range	100-385Vdc	100-385Vdc	100-385Vdc
Max. Solar Charge Current	100A	100A	100A
Max. MPPT Efficiency	>98%	>98%	>98%
Parallel MPPT Charger	YES	YES	YES

AC Charger Data			
Normal Voltage	230Vac	230Vac	230Vac
AC Voltage Range	110-280Vac	110-280Vac	110-280Vac
Max. Charge Current	60A	60A	60A
Frequency Range	50/60Hz(Auto Sensing)	50/60Hz(Auto Sensing)	50/60Hz(Auto Sensing)


General Data			
Dimensions(W/H/D)	504x330x135mm	504x330x135mm	504x330x135mm
Weight	14Kg	14Kg	14Kg
Protection Degree	IP 20	IP 20	IP 20
Relative Humidity	5%~95% Relative Humidity(Non-condensing)		
Operating Temperature	0~50℃	0~50℃	0~50℃
Storage Temperature	-15℃~60℃	-15℃~60℃	-15℃~60℃

Interfaces			
Display	LCD+LED	LCD+LED	LCD+LED
Lithium Battery Communication	CAN/RS485	CAN/RS485	CAN/RS485
RS485/Dry Connector	YES/YES	YES/YES	YES/YES
Wifi/GPRS	YES/YES	YES/YES	YES/YES
Warranty	2years	2years	2years


* For split phase version

Intelligent Monitor System

Network architecture

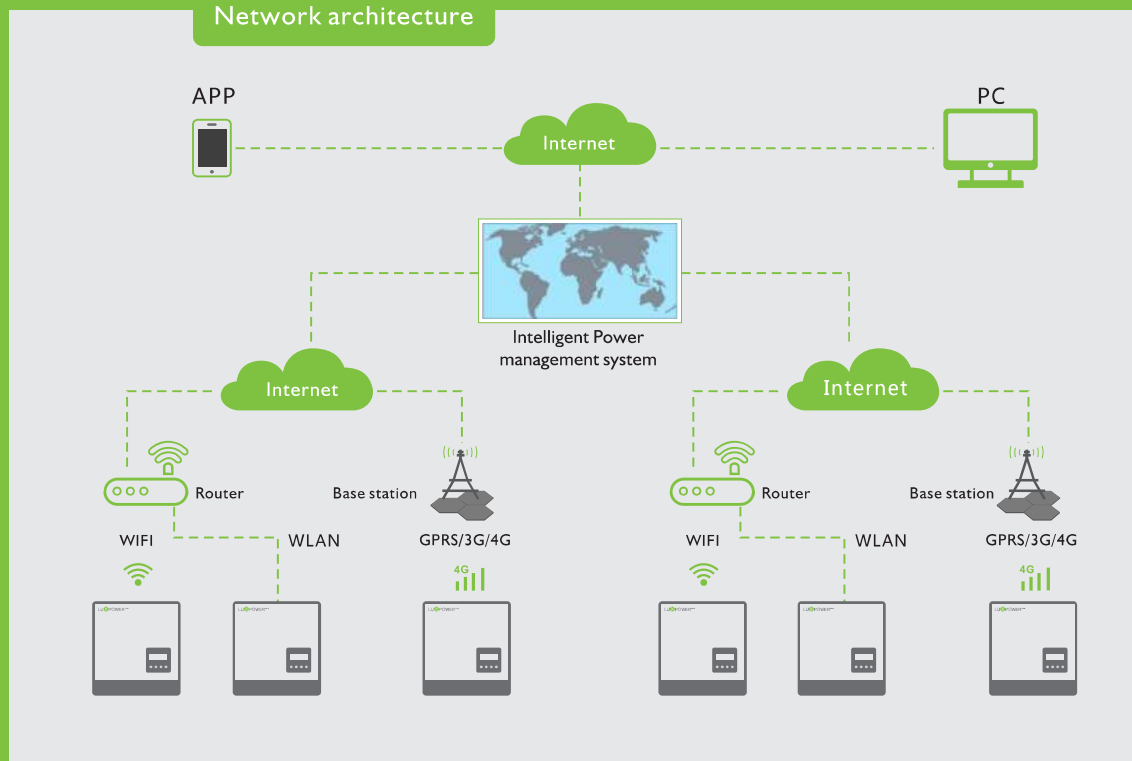

LuxPower View

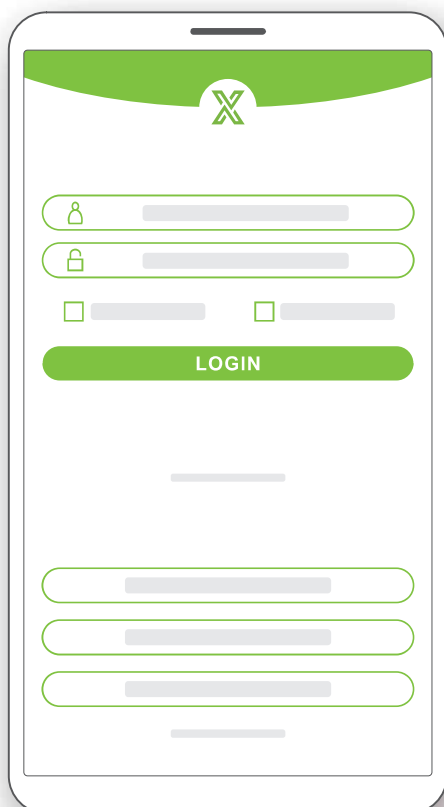

Android APP



IOS APP

Monitoring Features



Real-time monitoring and Management platform based on smart cloud technology



Advanced remote upgrade and management function for easy usage, maintenance and services



Real-time running data stored locally in the inverter for up to 30 days when wifi or LAN monitoring connection disconnected



One-click WIFI connection and much easier operation on the monitoring and management platform.



Multi-level system monitoring and management



Available for Web, iOS and Android system.

	
Certificate of Conformity	
Certificate No.:	TTSGAP/0000000000
Equipment:	High-End Inverter
Brand Name:	LUXPOWER™
Test Model Name:	LXP40K-LUX, LXP45K-LUX, LXP-60K-LUX, LXP-65K-LUX
Applicant:	ShenZhen Lux Power Technology Co., Ltd Room 402, 4th Floor, Building 48, ZhongHua Industrial Park, Zhongguo Community/HongGang Street, Baimen District/Shenzhen
Report No.:	PV0417500000000-1
Is in accordance with regulations: Automatic disconnection device with single-phase main surveillance in accordance with Engineering Recommendation G993-3 for photovoltaic systems with a single-phase parallel circuiting on its inverter in the public network. The automatic disconnection device is an integral part of the abandonment inverter. This serves as a replacement for the disconnection device with coupling function that can access the distribution network directly at any time	
Applied rules and standards Engineering Recommendation G993-3 Amendment 3-4 Amendment 3-4 Amendment 3-4 Recommendations for the Connection of Generating Plant To The Distribution Systems of Low-voltage Distribution Networks Operators	
At the time of issue of this certificate the safety concept of an abandonment representative product corresponds to the valid safety specifications for the specified use in accordance with regulations.	
	
Thomas Van der Schoot Managing PV Inverter Safety Date: 2019-04-05	
This document shall not be reproduced, revised or full, without the written approval of Bureau Veritas Certification Co., Ltd. (Bureau Veritas) Information given in this document is valid in the context of the described technical sample	

Application



“

*Where sun shined
Power always on*

”